

DELTA-T RF MONOCULAR

Ultra compact, lightweight, laser rangefinder.
Precise, calculation of linear range, angle,
vertical and horizontal distance.



Thank you for considering this precision optical equipment.

Delta Optical spółka z ograniczoną odpowiedzialnością sp.k.
Nowe Osiny, ul. Piękna 1, 05-300 Mińsk Mazowiecki, Poland
TEL +48 25 786 0520 | FAX +48 25 759 2995
BetterForever@deltaoptical.eu | DeltaOptical.eu



THE AIM IS OPTICAL PERFECTION

DELTA-T RF MONOCULAR

Rangefinder 2000: SKU DO-2701

Rangefinder 1200: SKU DO-2700

Measure inclination angle
6x magnification


Calculation of EHR
(Equivalent Horizontal Range)
and Vertical Offset
in 0.3 of a second

Clear, intuitive
interface

Continuous
scan mode






Compact
Lightweight



Magnification	6x
Objective	23mm
FOV @ 1000m	105m / 6°
Eye Relief	17mm
Diopter Adjustment	±3
Lens Coatings	HD Multilayer
Measuring Range	4.6-1830m / 5-2000yd*
Measuring Time	0.3s max
Accuracy @ 5-100m	± 0.5m
Accuracy @ 100-200m	± 1m
Accuracy @ 200-500m	± 2m
Accuracy @ >500m	± 0.5%
Angle	Yes
Angle Range	-89° to +89°
Vertical Offset	Yes
Horizontal Distance	Yes
Scan Mode	Yes
Laser Type	Class 1
Beam Diverge Vertical	1.1mrad
Beam Diverge Hrzntrl	0.125mrad
Display Type	LCD
Operating Temperature	-10°C/50°C
Waterproof	IPX4
Power Supply	CR2 (3V)
Chassis	PS+GF
Weight	190g / 6.7oz (inc battery)
Dimensions	102×35×70mm

*Measuring Range
RF2000: 4.6-1830m / 5-2000yd
wRF1200: 4.6-1100m / 5-1200 yd

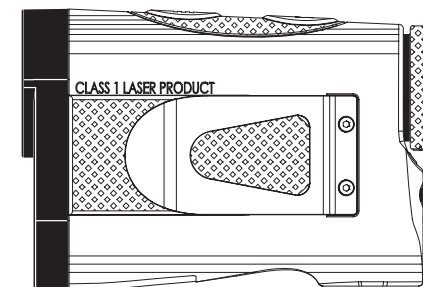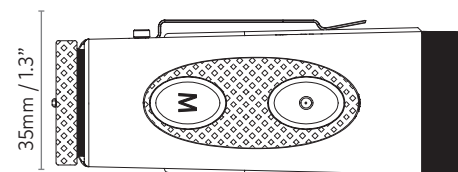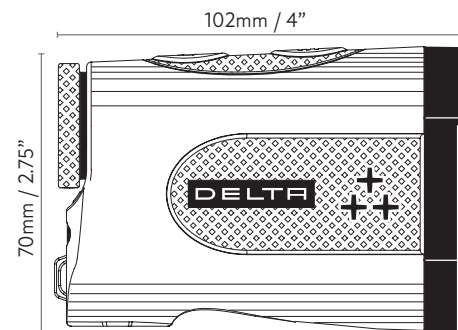

Fiberglass reinforced housing with
metal belt clip



THE AIM IS OPTICAL PERFECTION