

STRYKER HD

5-50x56 SFP

Perfect for F-Class Competition



Thank you for considering this precision optical equipment.

Delta Optical spółka z ograniczoną odpowiedzialnością sp.k.
Nowe Osiny, ul. Piękna 1, 05-300 Mińsk Mazowiecki, Poland
TEL +48 25 786 0520 | FAX +48 25 759 2995
BetterForever@deltaoptical.eu | DeltaOptical.eu



THE AIM IS OPTICAL PERFECTION

STRYKER HD 5-50x56 SFP

with DLS-1: SKU DO-2504
with DLS-2: SKU DO-2506
with DLS-3: SKU DO-2507

Superb ED glass
for sharp image
and true colour

Impressive light
transmission

Zero
stop

Locking
turrets


Ideal for
F-Class/Bench Rest

Parallax correction
10m to infinity


Tool-free
zeroing

34mm tube.
Vertical adjustment
up to 300cm @100m


DLS-1
MRAD @ 40X



DLS-2
MRAD



DLS-3
MOA @ 40X



Magnification Range 5x – 50x

Objective Diameter 56mm

Field of View @100m 4.5x 7.1m

Field of View @100m 30x 0.7m

Eye Relief 89 – 100mm

Diopter Range -2D/+3D

Water Proof (N2) 0.3kg/cm²

Reticle Position 2nd focal plane

Illumination Dot

Per Click 0.05MRAD*

Elev Adj Range 30MRAD**

Wind Adj Range 15MRAD***

Parallax Adjustment 10m – ∞

Zero-Stop YES

Tube Diameter 34mm

Length 398mm

Weight 1065g

Warranty 10 years

*With Reticle DLS-3 0.125MOA

**With Reticle DL3-3 100MOA

***With Reticle DL3-3 50MOA

Included in the box:
Throw Lever, Sunshader.



Optional extra:
FT Parallax Wheel.




DELTA

THE AIM IS OPTICAL PERFECTION


DLS-1 MRAD @ 40X

Precise target point covers 0.03 MRAD at 100m. 0.005mrاد crosshairs in the horizontal and vertical have markings in increments of 0.2mrاد and 1mrاد for quick easy adjustments for drop and windage correction. Excellent at lower magnifications (7 - 10x) when target point is 0.17 - 0.12mrاد. Day-night illumination.

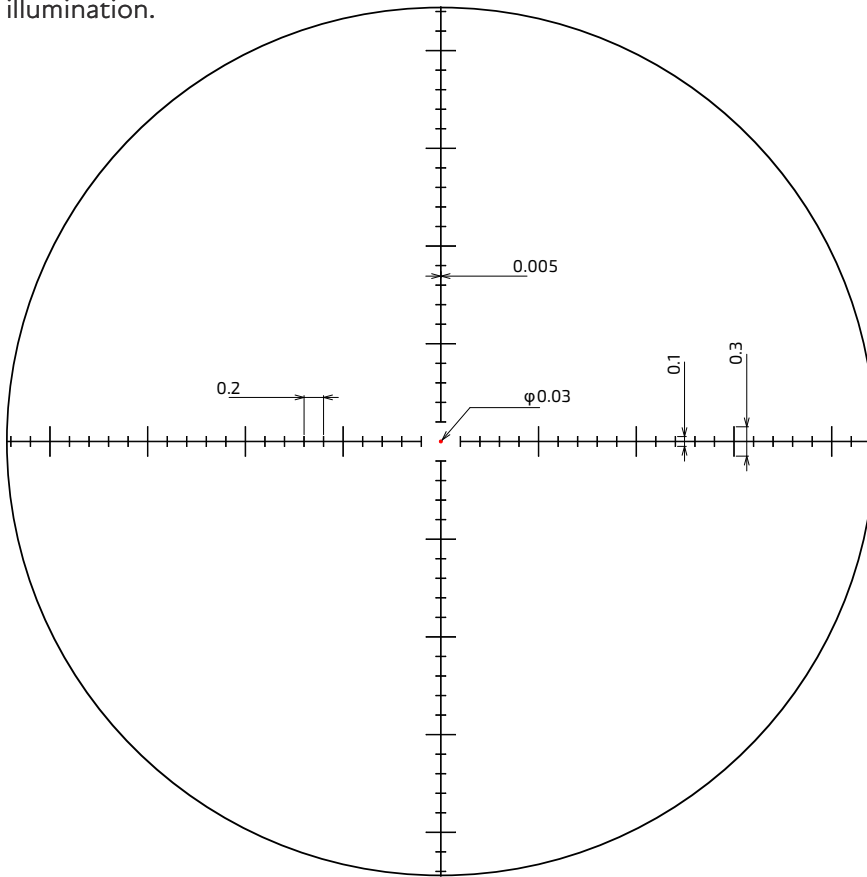

DLS-2 MRAD

Precision in pure form. Two thin 0.005mrاد crosshairs intersect in the centre at an angle of 90 degrees. Nothing distracts the eye, providing optimal overview of the field. Central illuminated point in intersection.

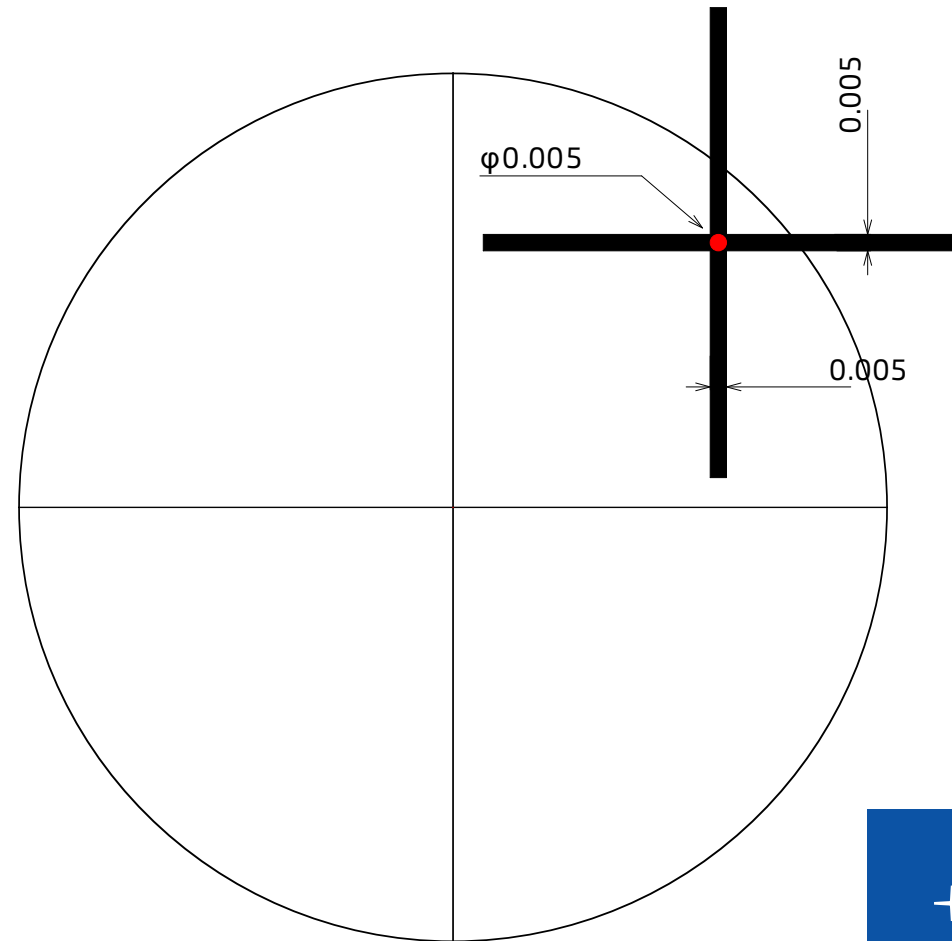


THE AIM IS OPTICAL PERFECTION

DLS-3

MOA @ 40X

Equivalent to DLS-1 reticle, but scaled in MOA. Aiming point covers 0.1 MOA (2.91 mm) at a distance of 100m.

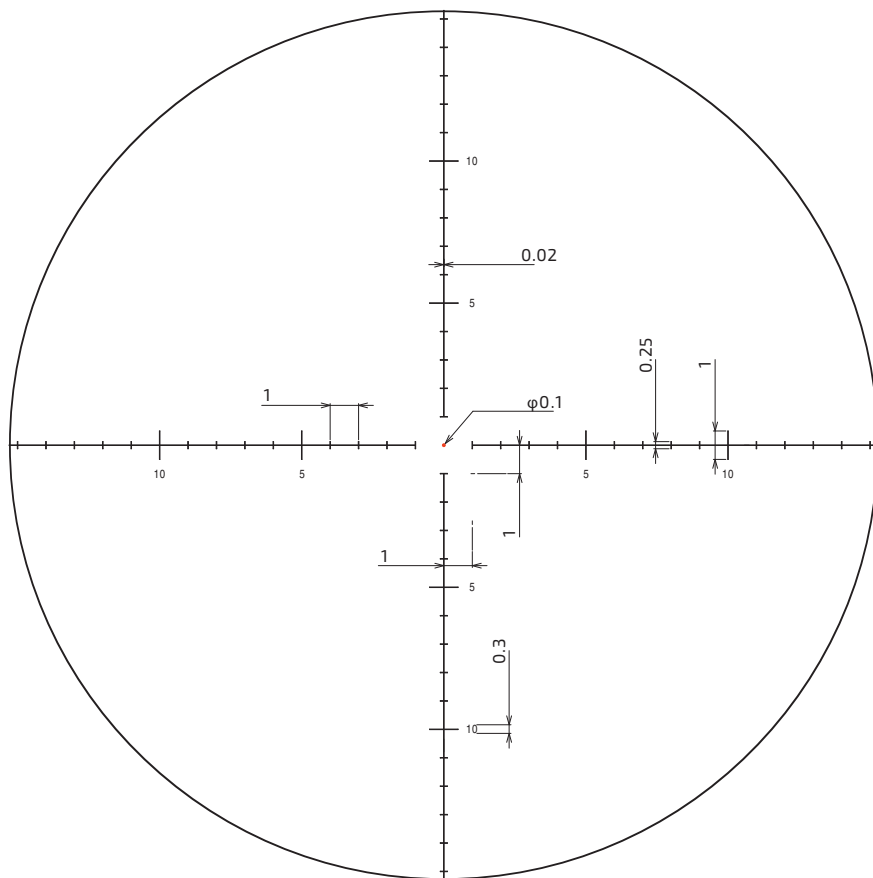

THE AIM IS OPTICAL PERFECTION