JAVELIN

4.5-30×56 FFP

Lockable turrets. Zero stop. Clicks 0.1 MRAD.
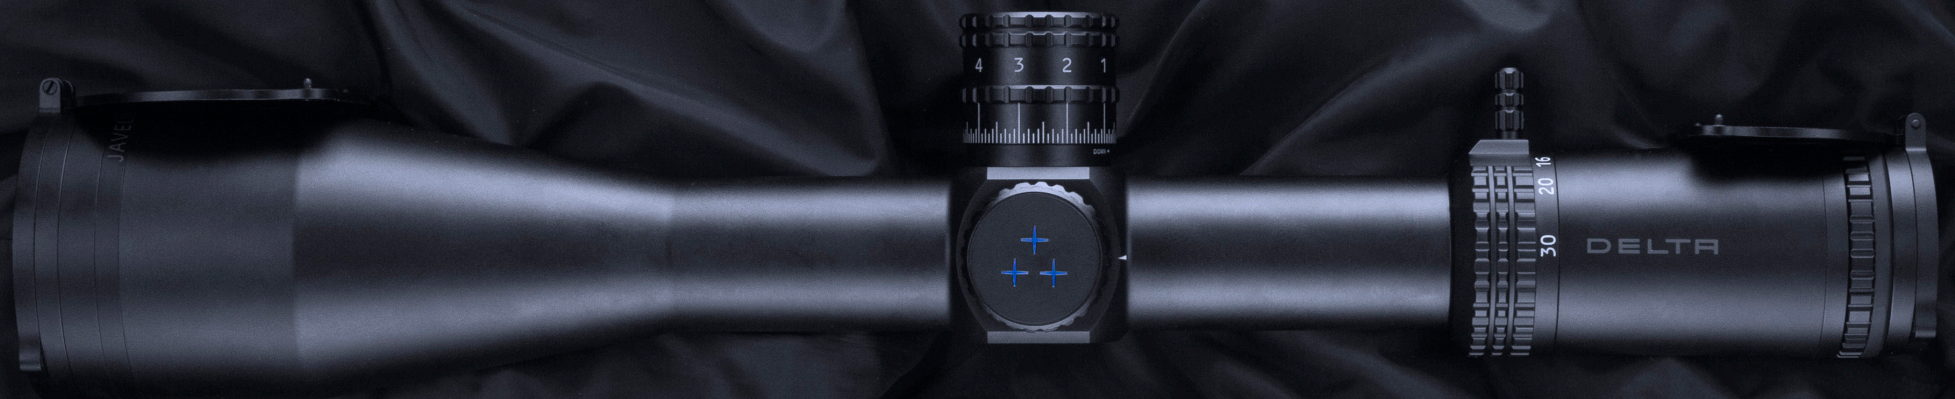
DELTA

THE AIM IS OPTICAL PERFECTION

JAVELIN
4.5-30×56 FFP

with SMR-1: SKU DO-2470
with SMR-2: SKU DO-2471

ED optics, large adjustment turrets, both lockable, 34mm tube, 0.1MRAD click, illuminated point, zero-stop, throw lever, metal flip-open covers, sunshade. Unique Scandinavian Match Reticles reticles designed by shooters: clean, simple, no distractions. Efficient and versatile.

Magnification Range	4.5x – 30x
Objective Diameter	56mm
Field of View @100m 4.5x	8.2m
Field of View @100m 30x	1.3m
Eye Relief	100mm
Diopter Range	-2D/+2D
Water Proof (N2)	0.3kg/cm2
Reticle Position	1st focal plane
Illumination	Dot
Per Click	0.1MRAD
Elev Adj Range	32MRAD
Wind Adj Range	32MRAD
Parallax Adjustment	25m – ∞
Zero-Stop	YES
Tube Diameter	34mm
Length	388.6mm
Weight	1036g
Warranty	10 years

Lockable turrets

Illuminated point

ED glass

Click 0.1MRAD

Zero-stop

SMR-1

SMR-2

Included in the box:
Throw Lever, Metal Flip-Open Covers, Sunshade.

DELTA

THE AIM IS OPTICAL PERFECTION

SMR-1

The SMR-1 is a holdover reticle for longrange field and PRS-style shooters. The illuminated centre makes it also ideal for low-light hunting. It features an open top, a floating centre dot, 0.2 mil hash marks and an integrated free floating ruler with 0.1 mil hash marks for easier target measurement.
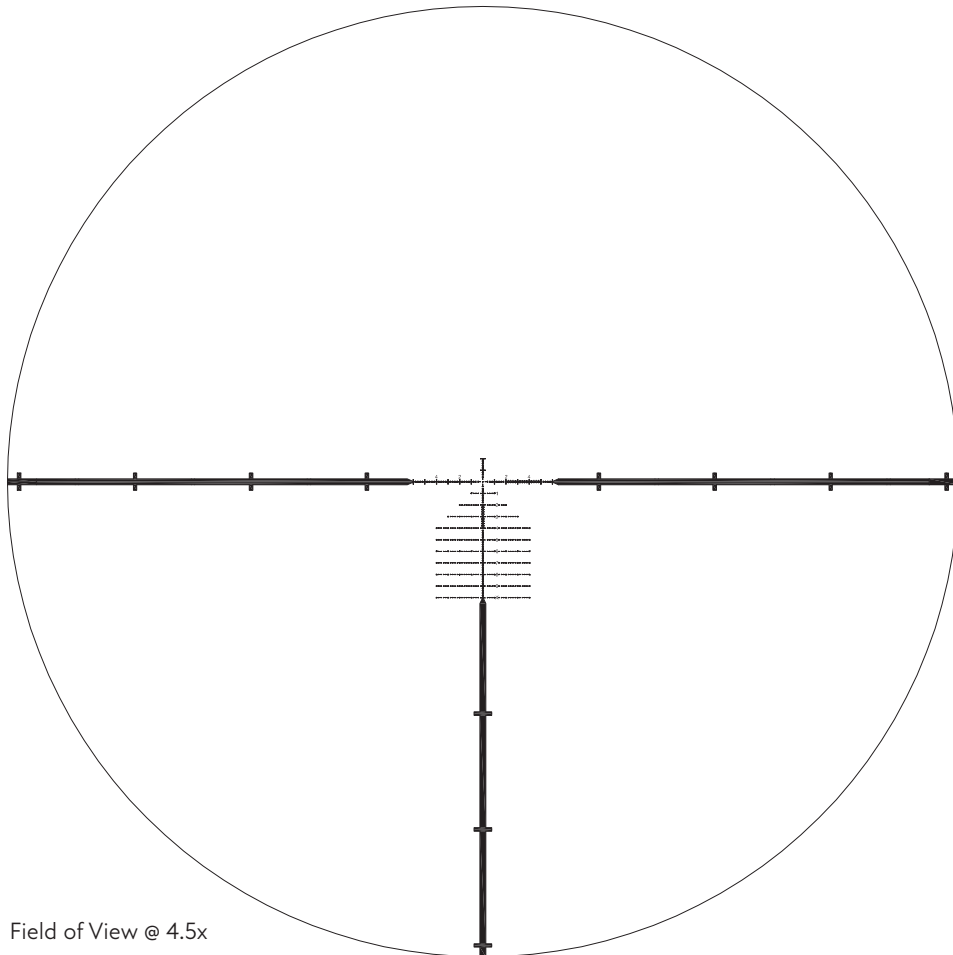
The holdover "Christmas tree" has 0.2 hash marks for distance and windage hold, the numbers for mil holdover are placed 1.2 mil on the right from centre to be easily spotted when counting holdover, but still far enough not to cover the target at the most critical parts of the reticle.

Field of View @ 4.5x

Field of View @ 30x
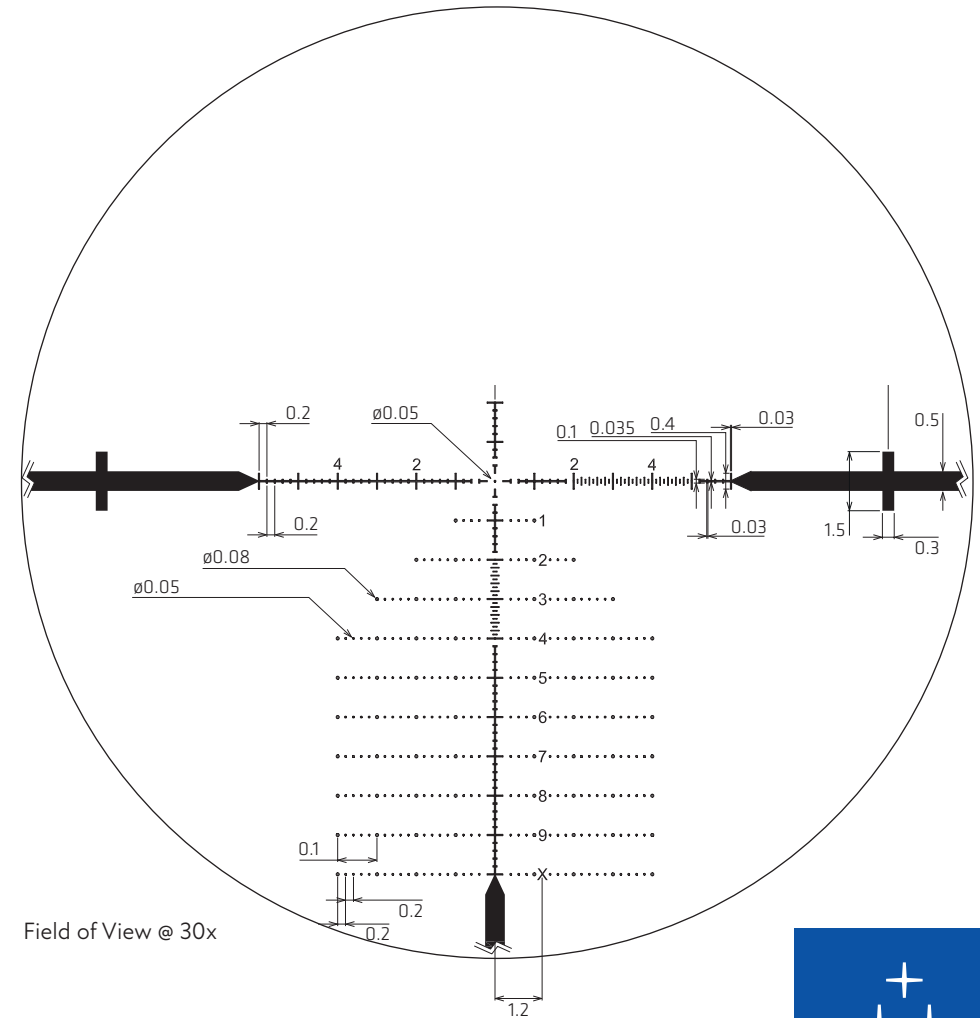
THE AIM IS OPTICAL PERFECTION

SMR-2

SMR-2 is more of a crossover reticle between hunting and shooting and it has all the same features as the SMR-1, aside from the "Christmas tree" in the SMR-1. Making it more suitable for the shooter that rarely utilizes the tree for holding over.

Field of View @ 4.5x

Field of View @ 30x

0.1
0.3
4   2   2   4
ø0.05
1
2   0.3
3
4
5
6
7
8
9
X
0.5

DELTA